


HYTERA PD405

QUICK REFERENCE GUIDE



D6016L



Ninehundred
Communications
Group

0845 600 4 900
www.ninehundred.co.uk


HYTERA PD405

QUICK REFERENCE GUIDE

Before Use


Attaching the Battery

To attach the battery, do as follows.

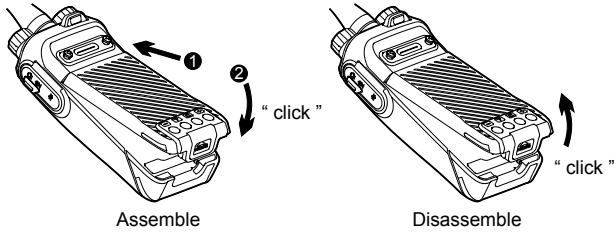


Note To remove the battery, please turn off the radio first. Then slide the battery latch upwards to unlock the battery.

Attaching the Antenna

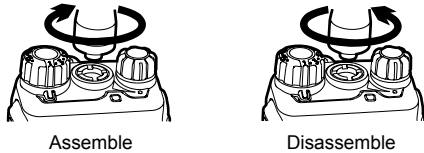

Caution Do not hold the radio by its antenna, otherwise the performance and lifespan of the antenna will be reduced.

Charging the Battery

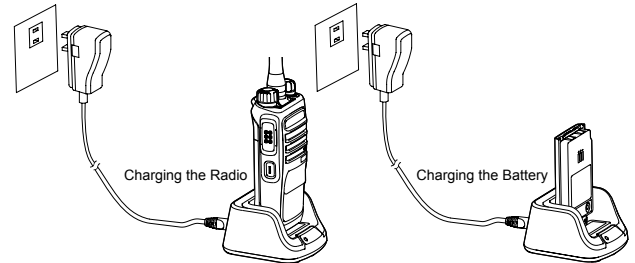

LED Indication	Current Status
The LED Indicator flashes red slowly	Standby (no load)
The LED Indicator glows red	Charging
The LED Indicator glows orange	90% charged
The LED Indicator glows green	Fully charged
The LED Indicator flashes red rapidly	Charging error


Caution

- Make sure the radio is powered off before charging. Read the Safety Information Booklet in advance to get necessary safety information.
- Charge a new battery for at least 5 hours before initial use for best performance.

Before Use

Checking the Battery Power


You may check the current battery power by holding down the programmed **Battery Power Indicator** key preset by your dealer. And release the key to exit. Battery power indications are listed below:



LED Indication	Battery Power
The LED indicator glows green	High
The LED indicator glows orange	Medium
The LED indicator glows red	Low
The LED indicator glows red and low battery alert sounds	Under the low battery threshold. Charge or replace the battery for proper radio operation

Status Indication


LED Indicator



LED Indication	Product Status
The LED indicator flashes green	Powering on
The LED indicator glows green	Receiving
The LED indicator glows red	Transmitting
The LED indicator flashes orange slowly	Scanning
The LED indicator glows orange	Call hung period. No voice is being transmitted or received on the traffic channel during a call. Within such period, you can hold down the PTT key to talk to the other party.


Product Overview

Product Controls

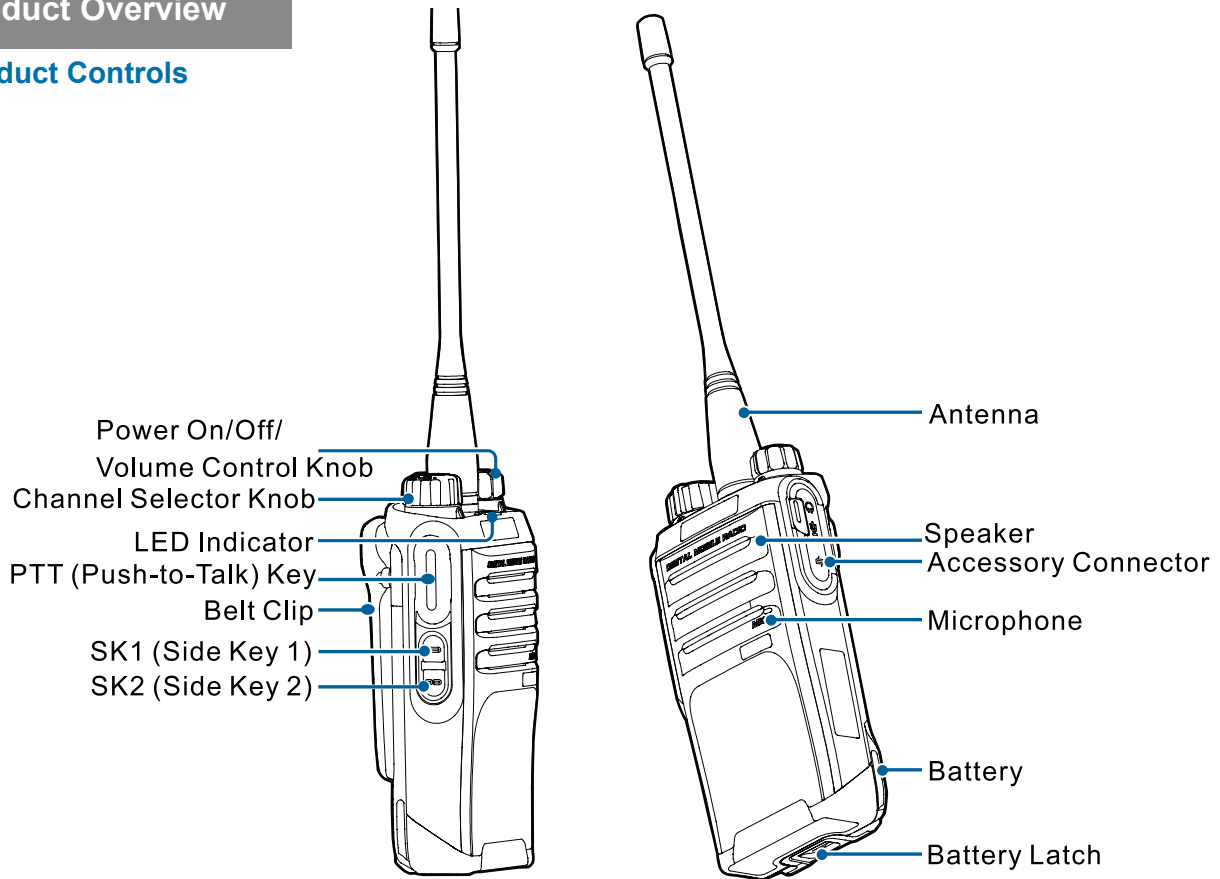


Basic Operation

Turning the Radio On/Off

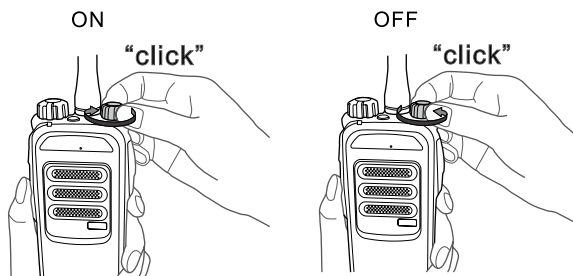

Adjusting the Volume




Selecting a Zone

A zone is a group of channels with the same property, which can facilitate convenient management over the channels. The radio supports three zones, each of which consists of up to 16 channels. You can switch to the

appropriate zone by pressing the programmed **Zone Up** or **Zone Down** key preset by your dealer.

If the Zone Notify feature is enabled by your dealer, the radio will announce the zone number when selecting zone.

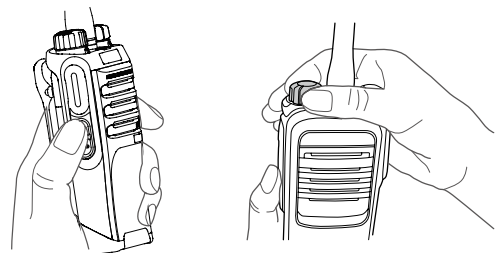

Selecting a Channel

After the radio is powered on, you can rotate the **Channel Selector Knob** to select an appropriate channel.

If the Channel Notify feature is enabled by your dealer, the radio will announce the channel number upon channel switching.